



FLEXSCREEN

The worlds first flexible window screen.

FlexScreen: Guide to Measuring

FlexScreen works well when it is captured by a screen track or pocket (minimum 1/4" deep) on at least 2 sides.

SCREEN WIDTH

(cross section of Horizontal screen track/pocket)




Measure from inside the left screen track to the opening of the right screen track, then add 3/16".

For deeper tracks/pockets, you may be able to add 1/4".

(When the screen is shifted to one side, the screen frame should be inside the opposite track & not visible.)

SCREEN HEIGHT

(cross section of Vertical screen track/pocket)

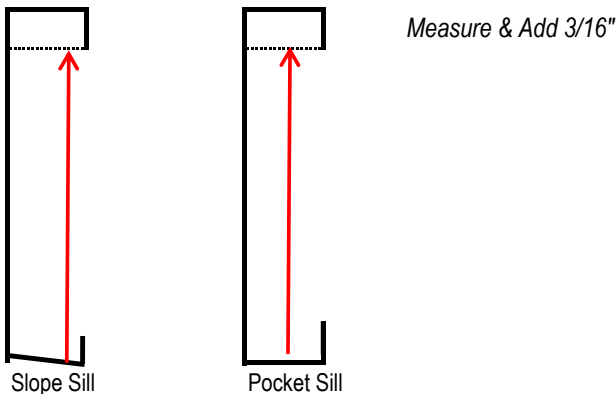

Measure from where the screen will rest on the sill of the window up to the opening of the top screen track, then add 3/16". For a deeper top track, you may be able to add 1/4".

(When the screen is resting on the sill, the screen frame should be inside the top track & not visible.)

BLAINE
DISTRIBUTION LLC
1-800-638-2200

17319 Blaine Drive
Hagerstown, MD 21740
BlaineDistribution.com